
TSM Standard 6K Gutter (OGEE)

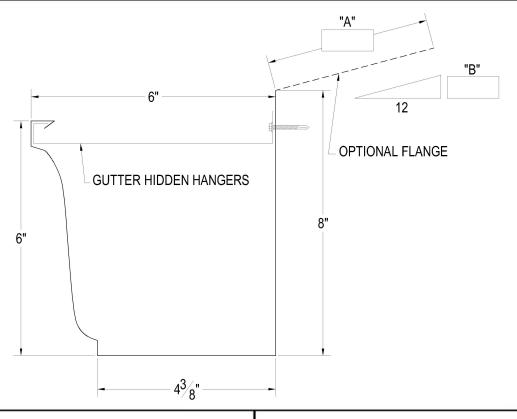

- Gutter Bracket and Fasteners provided.
- Term Bar and fasteners NOT provided.

PRINT APPROVAL:

Architect and/or Contractor shall verify all dimensions, sizes, and quantities, All products to be installed in strict accordance with Drexel's printed instructions.

A manazza d Dz.

ANTITIES:

Lineal Feet (10-0" Lengths") <u>:</u>
Outside Miters**:	Optional Welded (Surcharge Applies)
Inside Miters**:	Optional Welded (Surcharge Applies)
Right End Caps**:	Optional Welded (Surcharge Applies)
Left End Caps**:	Optional Welded (Surcharge Applies)

engths available up to 20'-0"

riveted

Approved By:	
Date:	* Optional le ** Standard
PROJECT:	
ARCHITECT:	
ROOFING CONTRACTOR:	
REPRESENTATIVE:	
41 North Lawn Ave / Ph. 914-3 Fax 914-3 web: www.t email: sales@	347-8157 347-8191 smny.com

☐ 24GA ☐ .040" AL Other: Finish: Color:

Effective Date: 8/8/17 Drawn By: B.Z.M.

Approved By: R.A.