
HIDE-FAST SL

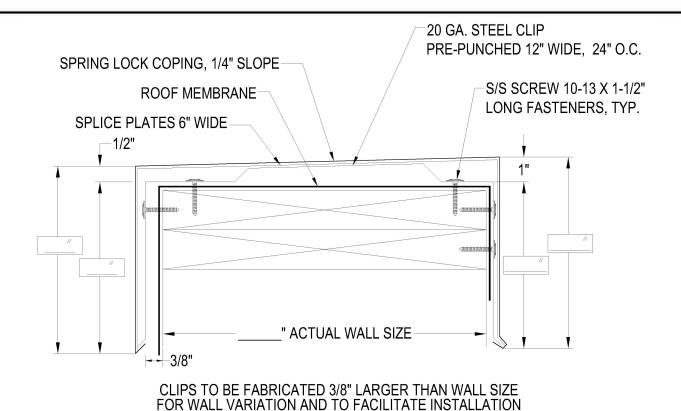

- Segmented Cleat and fasteners provided.
- Concealed Splice Plates provided.
- Splice Plate Sealant available for extra charge.

PRINT APPROVAL:

Architect and/or Contractor shall verify all dimensions, sizes, and quantities, All products to be installed in strict accordance with TSM's printed instructions.

Approved By:

QUANTITIES:

Lineal Feet (10'-0" Lengths):		
Outside Miters**:	Optional Welded (Surcharge Applies)	
Inside Miters**:	Optional Welded (Surcharge Applies)	
Right End Caps**:	Optional Welded (Surcharge Applies)	
Left End Caps**:	Optional Welded (Surcharge Applies)	
Splice Plate Tape Sealant:	Optional Sealant (Surcharge Applies)	
** Standard riveted		
1		

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

Date:

REPRESENTATIVE:



41 North Lawn Ave / Elmsford, NY 10523 Ph. 914-347-8157 Fax 914-347-8191 web: www.tsmny.com

email: sales@tsmny.com

MATERIAL:

☐ 24GA	☐ .040" AL
Other:	

Finish:

Color:

Effective Date: 5-1-13

Drawn By: J.S.

Approved By: B.P.