



PANEL DETAILS

STANDARD PANEL WIDTHS

15", 19"

Drexel Metals design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at www.drexelmetals.com


SUBSTRATES AVAILABLE

- Painted Galvalume® - 22ga, 24ga
- Drexlume™ - 22ga, 24ga
- Painted Aluminum - .032", .040"

Not seeing the gauge or material you are looking for? Contact your local Drexel Metals representative.

IDEAL APPLICATION COMMERCIAL & RESIDENTIAL

A superior integral seam design and quick installation - that's the hallmark of the DMC 550S panel. This expertly crafted interlocking roof system provides a powerfully protective weathertight seam. The finished results deliver a substantial measure of quality and style that's certain to stand the test of time.

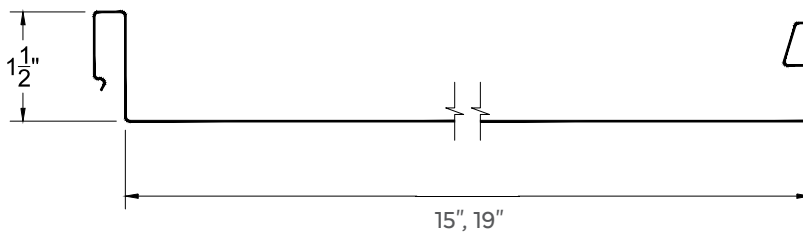


DMC 550S PROFILE


PROFILE OPTIONS




PANEL RIB OPTIONS




Flat Panel

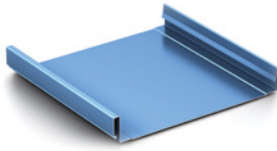


Clip Relief




Striations




Bead




Small V



Large V



Small Pencil



Large Pencil

Contact your local Drexel Metals representative for specific rib option availability.

PRODUCT INFORMATION

FINISHES

Available in a wide variety of coatings and colors. See the Drexel Metals color charts for standard colors and paint specifications.

PANEL RIB

Factory made or field rolled to exact lengths options

- Flat Panel
- Clip Relief
- Striations
- Bead
- Small and Large V
- Small and Large Pencil

INSTALLATION

Can be installed over plywood decking or insulated metal decking with approved underlayments. Please see Drexel Metals installation details for complete information.

SLOPE

Minimum slope 3:12

TESTING

- UL 580 Wind Uplift (Class 90)
- UL 2218 Class 4 Hail Impact
- UL 263 Fire Certification
- UL 790 Class A Fire Rating
- UL 1897 Extended Phase Wind Uplift
- UL Environmental - SRI Third-Party Verified
- ASTM E-1646 - Water Penetration
- ASTM E-1680 - Air Leakage

Testing in accordance with



WARRANTY

35 YEAR WARRANTY - GALVALUME AND ALUMINUM SUBSTRATES

35 year non pro-rated PVDF Paint Warranty

High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

25 YEAR WARRANTY - DREXLUME SUBSTRATE

Mill finished Galvalume with a two-sided, clear acrylic finish.

SHERWIN-WILLIAMS
Coil Coatings